

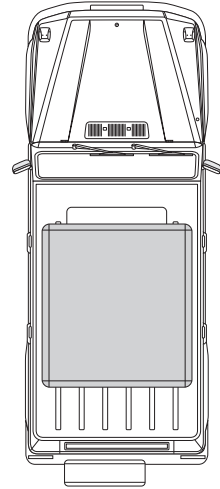


Installation:



- ④ Lift up the tent onto the rack from car side, adjust the tent to the roof center, ensuring the rear door can be opened/closed.

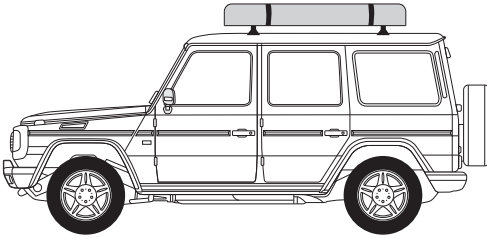


- ⑤ Slide the T shape bolts into the rails from two sides(as P1).

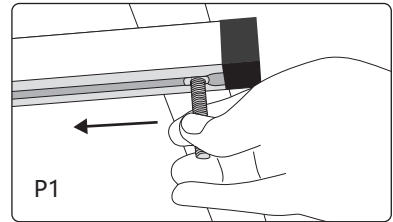

- ⑥ Slide T shape bolts into the middle hole of rail, with U-Shape Stator, M8 Arc Washer, M8 Flat Washer, and Plastic Nut lightly screwed in advance.(as P2)

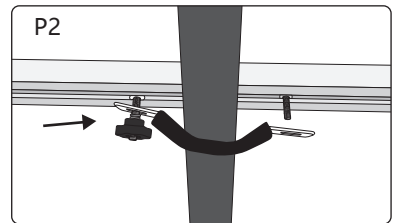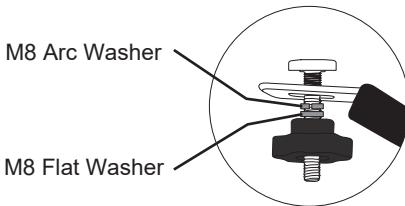


- ⑦ Screw the other side of U Shaped Stator with component in order as above, and ensure Stator tightened(as P3, same operation for rest).

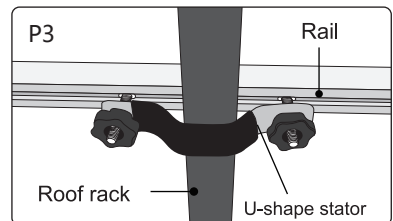


INCLUDED TOOLS:




U Shape Stator(4pcs)




M8 Flat Washer(8pcs)




M8 Arc Washer(8pcs)



Plastic Nut(8pcs)



T shape bolts(8pcs)




Tool Bag




M8*35mm
T shape bolts(8pcs)



6mm Hex Key(1pc)




Cross Screwdriver(1pc)



Aluminum Rivet(2pcs)



8-10mm open end wrench(1pc)



14mm open end wrench(1pc)